


POSITIVE GROUND VOLTAGE CONVERTER
MES612-PG6A

CD/Radio, Cell Phone Charger, Alarm, etc.

6 VOLT BATTERY
POSITIVE GROUND

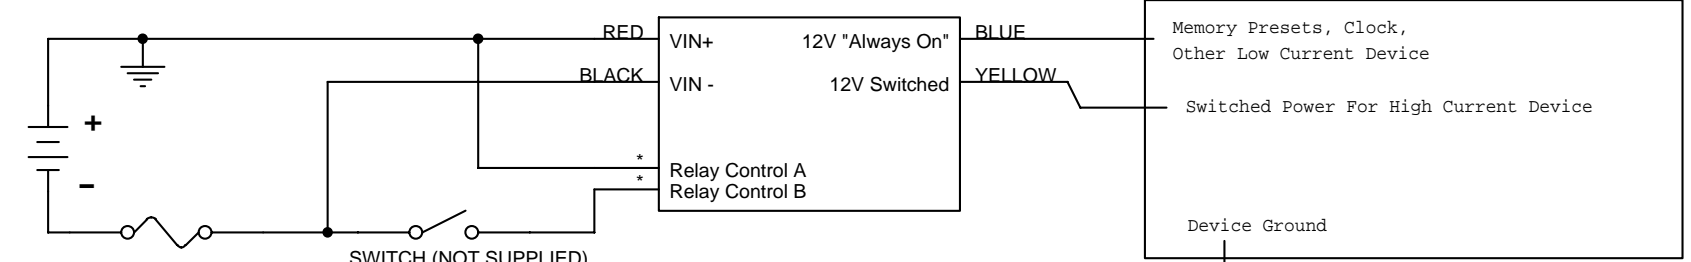

INPUT FUSE (NOT SUPPLIED)
MES612-PG6A 25 Amps Maximum

SWITCH (NOT SUPPLIED)
IGNITION OR OTHER CONTROL SWITCH

* Relay Control Wires are the two smaller 20 AWG wires.
They can be any color and can be swapped with each other.

VEHICLE GROUND IS THE POSITIVE
SIDE OF THE BATTERY.

PERMANENT DAMAGE TO YOUR DEVICE WILL OCCUR
IF THE GROUND SIDE OF THE DEVICE IS CONNECTED
TO THE NEGATIVE SIDE OF THE BATTERY.
OUTPUT VOLTAGE IS 13.5 VOLTS WITH REFERENCE TO
POSITIVE GROUND.

INPUT FUSE MUST BE INSTALLED AS SHOWN. KEEP
WIRES AS SHORT AS POSSIBLE.

THE "ALWAYS ON" OUTPUT CAN SUPPLY THE FULL
CURRENT LOAD, IF IT IS NOT BEING USED, COVER THE
END WITH ELECTRICAL TAPE OR HEAT SHRINK TUBING
TO PREVENT SHORTS.

Title		
MES612-PG6A		
Size A	Document Number	Rev C
Date:	Sheet 1 of 1	1